

Fire-Rated Poke-Throughs

SystemOne Flush

4-Inch Diameter Core Hole

HUBBELL

Features

- One 3/4" EMT for Power, Two 3/4" EMT for Low Voltage
- Cover Orderd Separately
- Sub-Plate Ordered Separately

Ordering Information

- Fire-Rated Poke Through Fitting Only.
- Requires Cover and Sub-Plate for Complete Installation

Catalog Number	UPC Number	Cover Series	Core Hole Diameter
S1PT4X4FIT	783585371399	S1CFC	4-Inch

Minimum Deck Thickness	Connection Type
2.25" Over Metal Deck	Flush

Standards

cULus Listed
 UL scrub water compliant
 ADA Compliant

Specifications

Cover load rating	300 lbs. static load through 3" diameter mandral
Access cover material (ordered separately)	Die cast aluminum
Fire Rating	1 - 4 Hour Fire Rating


Required

Covers and Sub-Plates

[Click here](#)

Accessories

Junction Box - 27 Cubic Inch	S1FRPTJB
4" Pre-Pour Tube, removed need for core hold drilling	S1R4PPT

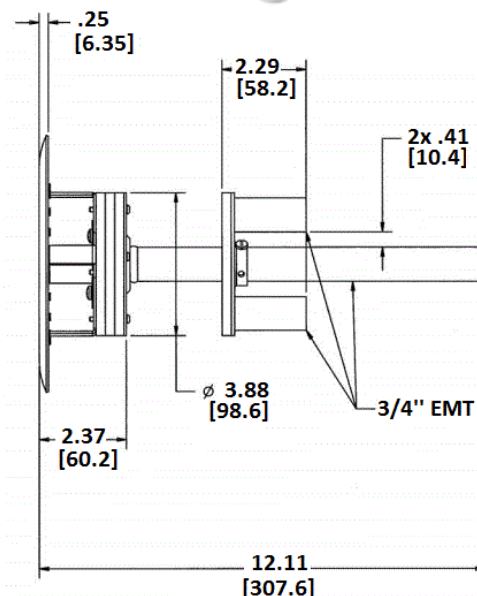

LEFFELECTRIC



Headquarters | 4700 Spring Rd, Brooklyn Hts, OH 44131 | 216.432.3000 | www.LEFFELECTRIC.COM

Akron
330.379.9800

Elyria
440.324.5483

Mentor
440.946.5448

Strongsville
440.572.8188

Warren
330.372.3344

Warrensville Hts
216.591.0050

Youngstown
330.799.1366